


INSTALLATION INSTRUCTIONS

Initializing the XSVI-2004:

When all the connections are completed plug the XSVI-2004 into the vehicle. Turn the ignition key to the "On" position for thirty seconds, then turn the key off.

Adjusting the differential line convertor:

Turn the potentiometers clockwise to increase the audio level of the door woofers and turn the potentiometers counter clockwise to decrease the audio level of the door woofers. (Figure A)

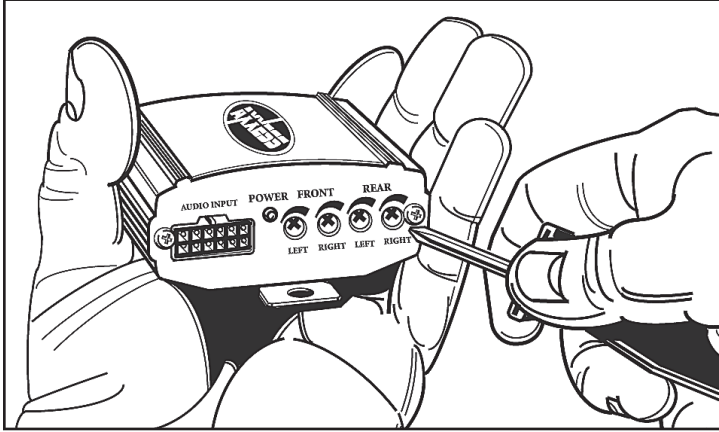

(Figure A)


INSTALLATION INSTRUCTIONS

Initializing the XSVI-2004:

When all the connections are completed plug the XSVI-2004 into the vehicle. Turn the ignition key to the "On" position for thirty seconds, then turn the key off.

Adjusting the differential line convertor:

Turn the potentiometers clockwise to increase the audio level of the door woofers and turn the potentiometers counter clockwise to decrease the audio level of the door woofers. (Figure A)

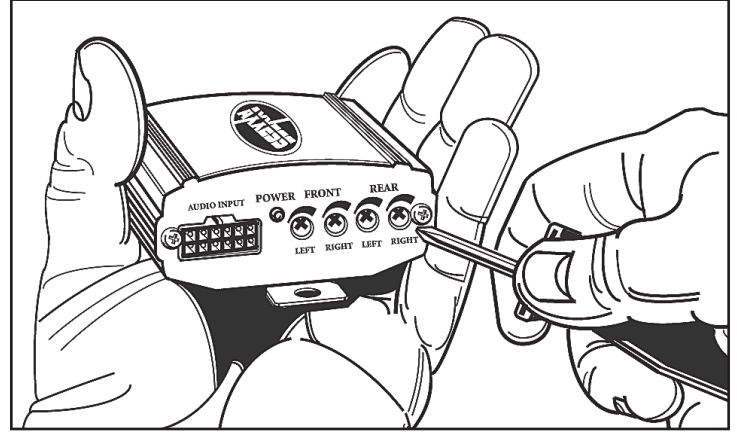

(Figure A)


INSTALLATION INSTRUCTIONS

Initializing the XSVI-2004:

When all the connections are completed plug the XSVI-2004 into the vehicle. Turn the ignition key to the "On" position for thirty seconds, then turn the key off.

Adjusting the differential line convertor:

Turn the potentiometers clockwise to increase the audio level of the door woofers and turn the potentiometers counter clockwise to decrease the audio level of the door woofers. (Figure A)

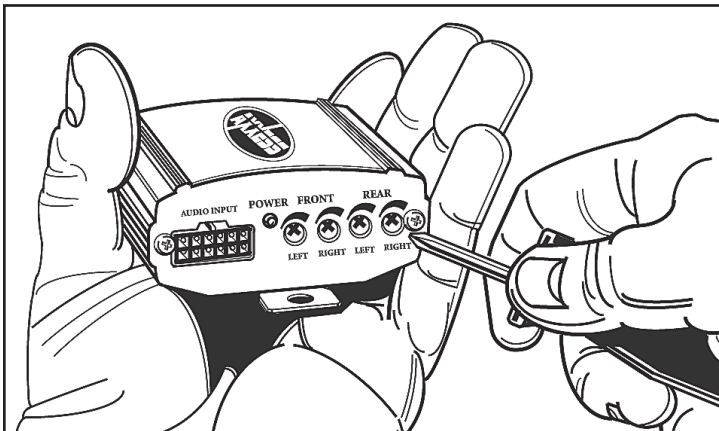

(Figure A)


INSTALLATION INSTRUCTIONS

Initializing the XSVI-2004:

When all the connections are completed plug the XSVI-2004 into the vehicle. Turn the ignition key to the "On" position for thirty seconds, then turn the key off.

Adjusting the differential line convertor:

Turn the potentiometers clockwise to increase the audio level of the door woofers and turn the potentiometers counter clockwise to decrease the audio level of the door woofers. (Figure A)

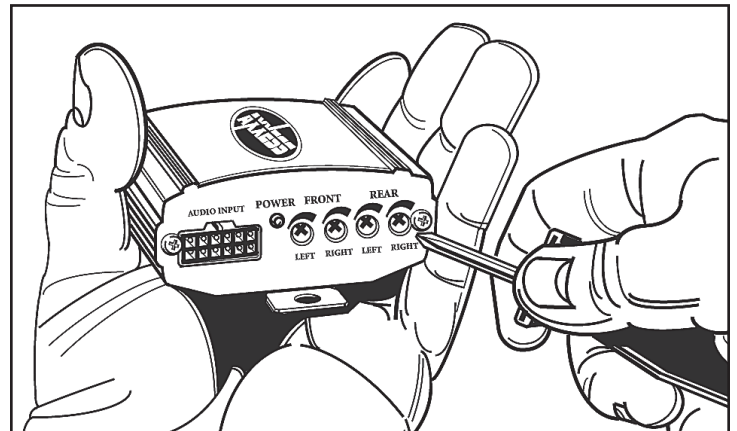

(Figure A)